


GARAGE SECTION

Over 600 sq.ft.(400 sq.ft if brick)

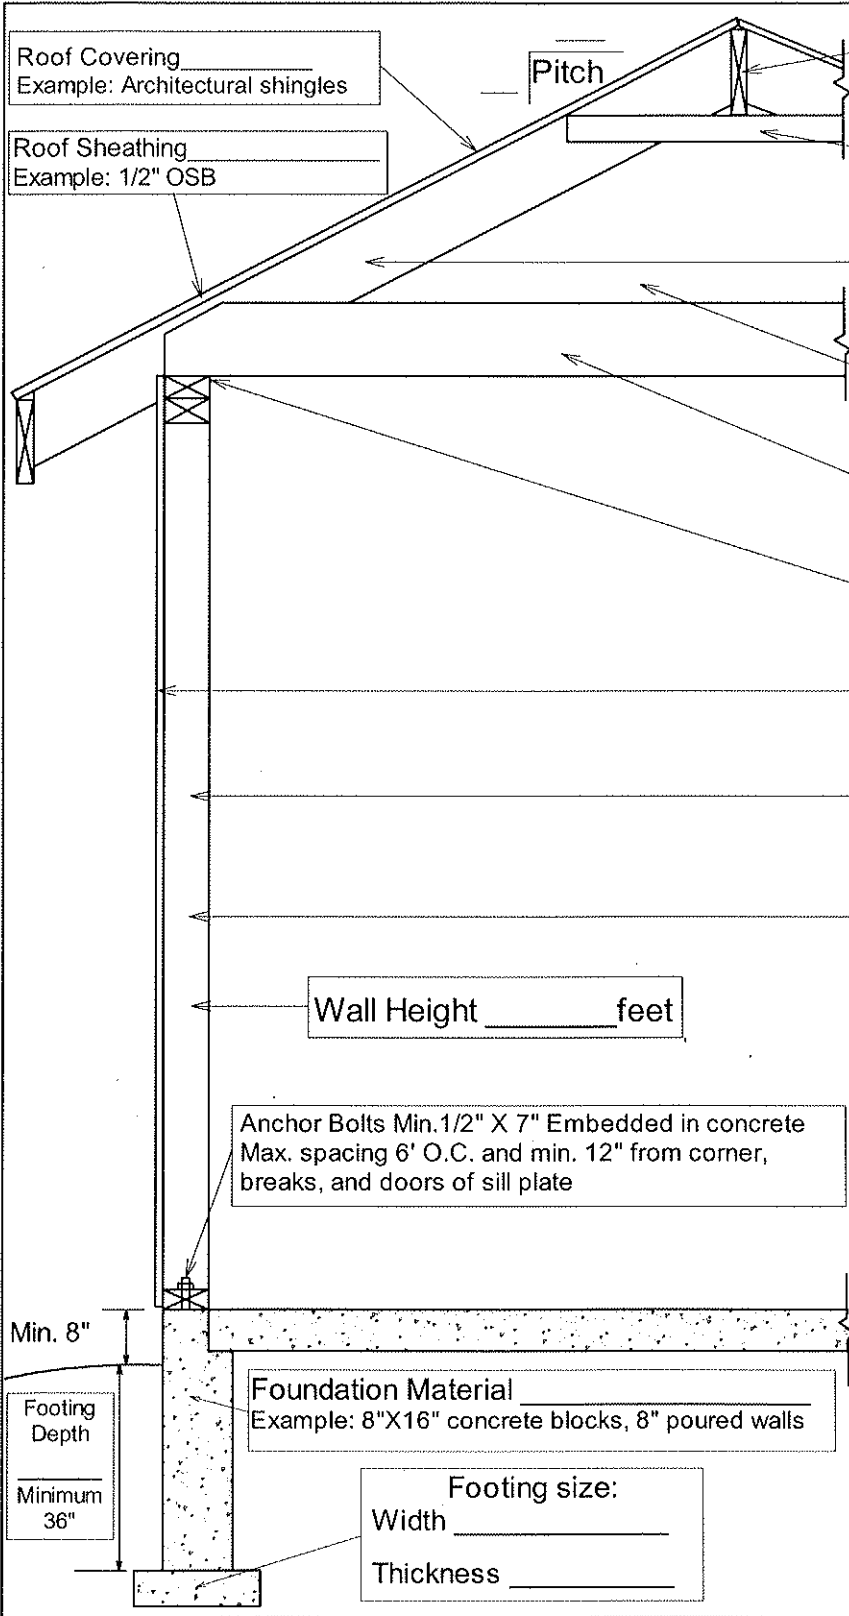

Roof Covering _____
Example: Architectural shingles

Roof Sheathing _____
Example: 1/2" OSB

Pitch _____

Ridge Board _____ X _____
Example: 2" X 8" (Larger than cut of rafter)

Collar Tie _____ X _____ at _____ O.C.
Example: 2" x 6" at 48" O.C.

Rafters 2" X _____ or Trusses at _____ O.C.
Example: Rafters 2"X 8" at 24" O.C. (circle one)

Insulation R- _____
Example: R-49

Ceiling Joist 2" X _____ at _____ O.C.
Example: 2" X 10" at 24" O.C.

Truss / Rafter Tie Down Straps or Fasteners

Wall Sheathing _____
Example: 7/16" OSB

Wall Studs 2"X _____ at _____ O.C.
Example: 2" X 6" at 16" O.C.

Wall Insulation R- _____
Example: R-20

Wall Height _____ feet

Anchor Bolts Min. 1/2" X 7" Embedded in concrete
Max. spacing 6' O.C. and min. 12" from corner,
breaks, and doors of sill plate

Min. 8"
Footing Depth
Minimum 36"

Foundation Material _____
Example: 8"X16" concrete blocks, 8" poured walls

Footing size:
Width _____
Thickness _____

Door and Window Headers*
Size and Material _____
Overhead Door Header*
Size: _____
Material: _____
Span: _____
*Include manufacturers spec's if using other than dimensional lumber

Garage is heated? Yes No
Garage has electricity? Yes No
Size of service? _____ AMPS