


SHED SECTION

Over 600 sq.ft.(400 sq.ft if brick)

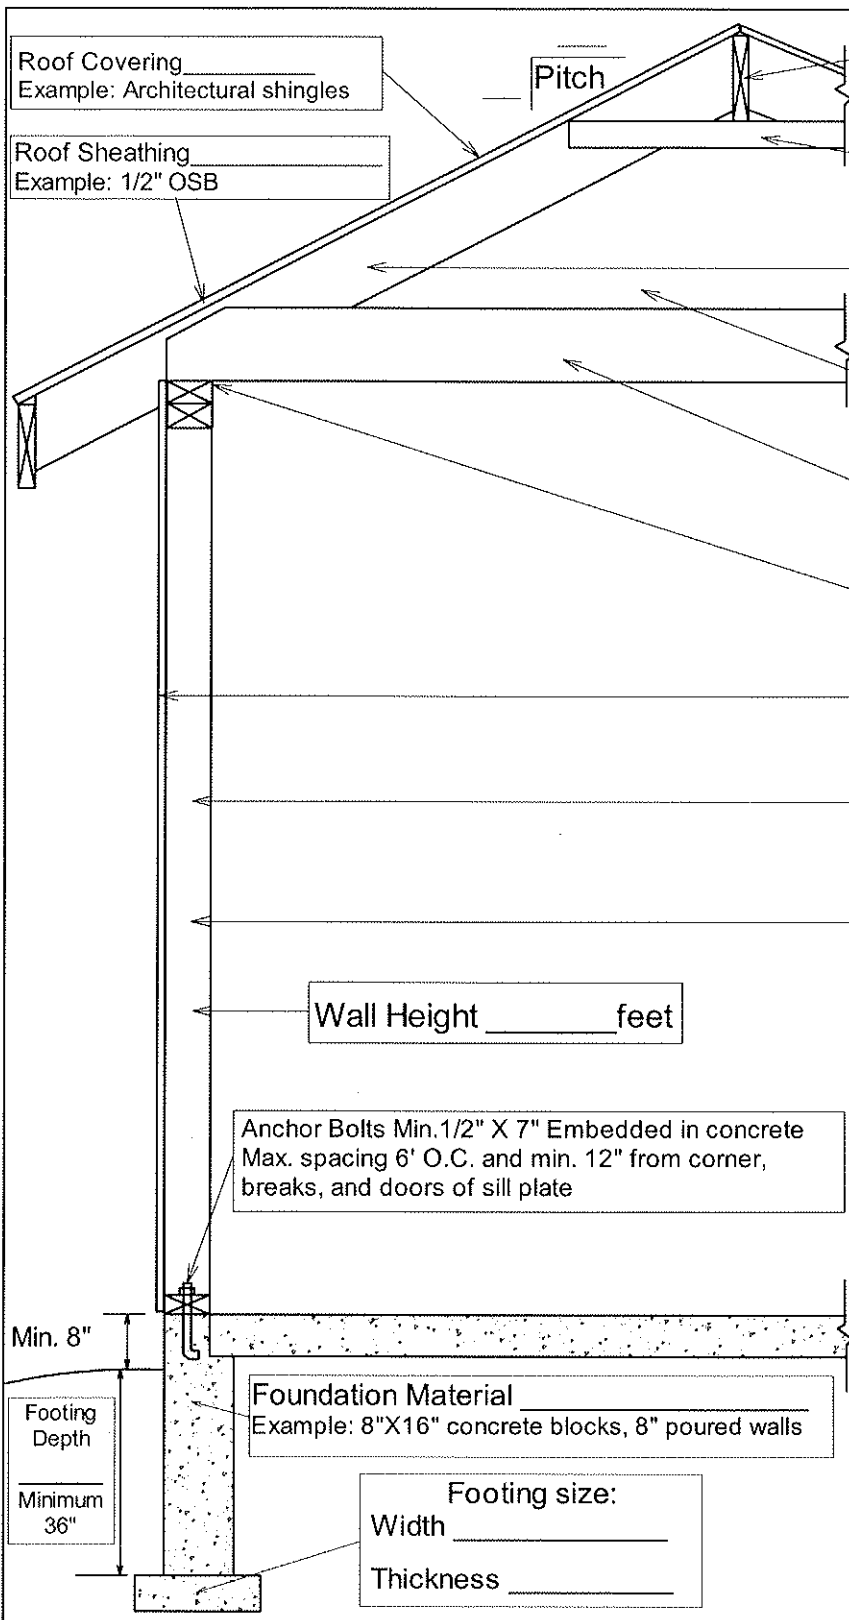

Ridge Board _____ X _____
 Example: 2" X 8" (Larger than cut of rafter)

Collar Tie _____ X _____ at _____ O.C.
 Example: 2" x 6" at 48" O.C.

Rafters 2" X _____ or Trusses at _____ O.C.
 Example: Rafters 2"X 8" at 24" O.C. (circle one)

Insulation R-_____
 Example: R-49

Ceiling Joist 2" X _____ at _____ O.C.
 Example: 2" X 10" at 24" O.C.

Truss / Rafter Tie Down Straps or Fasteners

Wall Sheathing _____
 Example: 7/16" OSB

Wall Studs 2"X _____ at _____ O.C.
 Example: 2" X 6" at 16" O.C.

Wall Insulation R-_____
 Example: R-20

Wall Height _____ feet

Anchor Bolts Min. 1/2" X 7" Embedded in concrete
 Max. spacing 6' O.C. and min. 12" from corner,
 breaks, and doors of sill plate

Min. 8"
 Footing Depth
 Minimum 36"

Foundation Material _____
 Example: 8"X16" concrete blocks, 8" poured walls

Footing size:
 Width _____
 Thickness _____

Door and Window Headers*
 Size and Material _____
 Overhead Door Header*
 Size: _____
 Material: _____
 Span: _____
 *Include manufacturers spec's if using other than dimensional lumber

Shed is heated? Yes No
 Shed has electricity? Yes No
 Size of service? _____ AMPS